


无油衬套

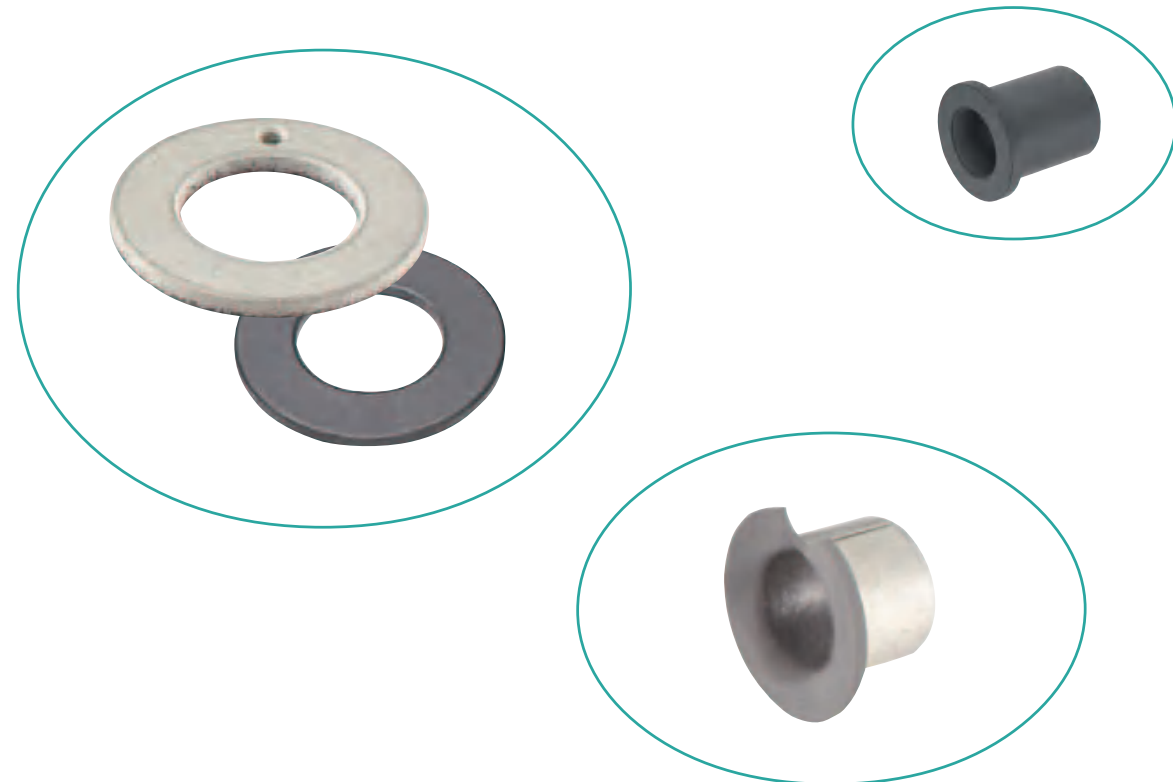

无油衬套

—铜合金直柱标准型·薄壁内径F7外径m6—

Order 订货示例	型式 (1Type · 2d)	—	3L
	RD-OFBZ10	—	15
	RD-OFBZU16	—	20

Type	类型	材质	内径公差	外径公差
RD-OFBZ	标准型	高强度黄铜合金	F7	m6
RD-OFBZU	薄壁型	镶嵌固体润滑剂		

标准型
RD-OFBZ

薄壁型
RD-OFBZU

32

*与本产品相配固定座直径公差: F7 (仅供参考)。
 *内径F7型推荐配套轴 d8: 一般用(高负载) f8: 高精度用
 e7: 一般用(轻负载) g6: 高精度用(间歇运转)

型式	1Type	2dF7	3L	RD-OFBZ		RD-OFBZU		D尺寸公差			
				Dm6	N	紧固螺丝	Dm6	N	D	外径m6	
5		+0.022	8 10 12 15	9			7		7~10	+0.015	
6		+0.010	8 9 10 12 15 16 20	10			8			+0.006	
8		+0.028	8 10 12 15 16 20 25	12	2	M4×8	10	1		+0.018	
10		+0.013	8 10 12 15 16 20 25 30	14			12			11~18	+0.007
12			8 10 12 15 16 20 25 30 35	18			15			19~30	+0.021
13			10 12 15 16 20 25 30 35	19			18	1.5			+0.008
15		+0.034	10 12 15 16 20 25 30 35 40	21	3	M5×8	18			+0.025	
16		+0.016	10 12 15 16 19 20 25 30 35 40	22			20			31~50	+0.009
18			10 12 15 16 19 20 25 30 35 40	24			22				+0.025
20			10 12 15 16 20 25 30 35 40 50 60	28	4		24			51~80	+0.030
20A		+0.041	10 12 15 16 20 25 30 35 40 50	30	5	M6×16	—	2		+0.011	
25		+0.020	12 15 16 20 25 30 35 40 50 60	33	4		29			81~120	+0.035
25A			12 15 16 20 25 30 35 40 50 60	35	5		—				+0.013
30			12 15 16 20 25 30 35 40 50 60 70	38	4		34				
35			20 25 30 35 40 50 60 70	44	4.5	M8×16	40				
40		+0.050	20 25 30 35 40 50 60 70 80	50	5		45	2.5			
50		+0.025	30 35 40 50 60 70 80	62	6		55				
60		+0.060	50 60 70 80	75	7.5		—				
80		+0.030	60 70 80	96	8	—					
100		+0.071	80 100	120	10	—					

*带有()的L尺寸仅限 RD-OFBZ

